


# YORU Cable Ties Datasheet



**Model** YR900-16STL  
**Size Label** 36" x 16.0 mm.



|                                 |                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------|
| <b>Color</b>                    | Silver                                                                                     |
| <b>Type</b>                     | Stainless (Ball Lock)                                                                      |
| <b>Material</b>                 | Stainless Steel 304 (SUS304)                                                               |
| <b>Flammability</b>             | UL94 V-2                                                                                   |
| <b>ROHS Compliant</b>           | Yes                                                                                        |
| <b>UL Recognized</b>            | Yes                                                                                        |
| <b>Releasable Closure</b>       | No                                                                                         |
| <b>Length</b>                   | 36 inch (Imperial)                                                                         |
|                                 | 900 mm. (Metric)                                                                           |
| <b>Width</b>                    | 16.00 mm. (Body)                                                                           |
|                                 | 19.26 mm. (Head)                                                                           |
| <b>Thickness</b>                | ≈ 0.39 mm. (Body) ± 10%                                                                    |
| <b>Operating Temperature</b>    | -76°F to +1,022°F (Fahrenheit)                                                             |
|                                 | -60°C to +550°C (Celsius)                                                                  |
| <b>Minimum Tensile Strength</b> | 375.0 lbs (Imperial)                                                                       |
|                                 | 170.0 Kgs (Metric)                                                                         |
| <b>Bundle Diameter</b>          | 34.0 mm. (Minimum)                                                                         |
|                                 | 239.0 mm. (Maximum)                                                                        |
| <b>Weight</b>                   | ≈ 39.65 grams (1 piece)                                                                    |
| <b>Features</b>                 | Easy operation, Good insulation, Self-locking, Lightweight, Anti-corrosion and durability. |

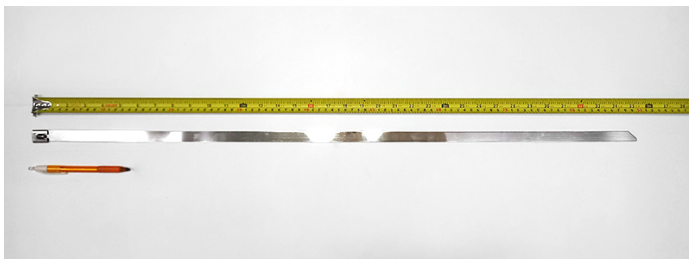

Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of ± 5%).