
## **YORU Cable Ties Datasheet**



Model <u>YR150-04UVB</u>
Size Label 6" x 3.6 mm.



Type   Standard UV Black		
Polyamide 6.6 High impact (Nylon 6.6 or PA66)   Flammability   UL94 V-2     ROHS Compliant   Yes     UL Recognized   Yes     Releasable Closure   No     6 inch (Imperial)     150 mm. (Metric)     3.60 mm. (Body) ±0.2 mm     6.40 mm. (Head) ±0.2 mm     7 inckness   * 1.21 mm. (Body) ± 10%     40°F to +185°F (Fahrenheit)     40°C to +85°C (Celsius)     33.0 lbs (Imperial)     15.0 Kgs (Metric)     Bundle Diameter   3.0 mm. (Maximum)     **e 0.80 grams (1 piece)     **e 1.24 mm (PA66)     **e 1.25 mm	Color	Black (UV Black)
Flammability   UL94 V-2     ROHS Compliant   Yes     UL Recognized   Yes     Releasable Closure   No     6 inch (Imperial)     150 mm. (Metric)     3.60 mm. (Body) ±0.2 mm     6.40 mm. (Head) ±0.2 mm     Thickness   ≈ 1.21 mm. (Body) ± 10%     40°F to +185°F (Fahrenheit)     40°C to +85°C (Celsius)     Minimum Tensile Strength     Bundle Diameter     3.0 mm. (Minimum)     35.0 mm. (Minimum)     35.0 mm. (Maximum)     ≈ 0.80 grams (1 piece)	Туре	Standard UV Black
ROHS Compliant   Yes	Material	Polyamide 6.6 High impact (Nylon 6.6 or PA66)
UL Recognized         Yes           Releasable Closure         No           Length         6 inch (Imperial)           150 mm. (Metric)           3.60 mm. (Body) ±0.2 mm           6.40 mm. (Head) ±0.2 mm           Thickness         ≈ 1.21 mm. (Body) ± 10%           Operating Temperature         -40°F to +185°F (Fahrenheit)           -40°C to +85°C (Celsius)           Minimum Tensile Strength         33.0 lbs (Imperial)           15.0 Kgs (Metric)           Bundle Diameter         3.0 mm. (Minimum)           35.0 mm. (Maximum)           weight         ≈ 0.80 grams (1 piece)	Flammability	UL94 V-2
Releasable Closure         No           Length         6 inch (Imperial)           150 mm. (Metric)           3.60 mm. (Body) ±0.2 mm           6.40 mm. (Head) ±0.2 mm           Thickness         ≈ 1.21 mm. (Body) ± 10%           Operating Temperature         -40°F to +185°F (Fahrenheit)           40°C to +85°C (Celsius)           33.0 lbs (Imperial)           15.0 Kgs (Metric)           Bundle Diameter           Weight         ≈ 0.80 grams (1 piece)	<b>ROHS Compliant</b>	Yes
Length       6 inch (Imperial)         150 mm. (Metric)         Width       3.60 mm. (Body) ±0.2 mm         6.40 mm. (Head) ±0.2 mm         Thickness       ~ 1.21 mm. (Body) ± 10%         40°F to +185°F (Fahrenheit)         -40°C to +85°C (Celsius)         33.0 lbs (Imperial)         15.0 Kgs (Metric)         3.0 mm. (Minimum)         35.0 mm. (Maximum)         Weight       ~ 0.80 grams (1 piece)	UL Recognized	Yes
150 mm. (Metric)   3.60 mm. (Body) ±0.2 mm   6.40 mm. (Head) ±0.2 mm   6.40 mm. (Head) ±0.2 mm   40°F to +185°F (Fahrenheit)   40°C to +85°C (Celsius)   33.0 lbs (Imperial)   15.0 Kgs (Metric)   30.0 mm. (Minimum)   35.0 mm. (Maximum)   35.0 mm. (Maximum)   20.80 grams (1 piece)   3.0 mm. (1 piece)   3	Releasable Closure	No
150 mm. (Metric)   3.60 mm. (Body) ±0.2 mm   6.40 mm. (Head) ±0.2 mm         Thickness   ≈ 1.21 mm. (Body) ± 10%         Operating Temperature	Length	6 inch (Imperial)
Width       6.40 mm. (Head) ±0.2 mm         Thickness       ≈ 1.21 mm. (Body) ± 10%         Operating Temperature         40°F to +185°F (Fahrenheit)         -40°C to +85°C (Celsius)         33.0 lbs (Imperial)         15.0 Kgs (Metric)         3.0 mm. (Minimum)         35.0 mm. (Maximum)         Weight         ≈ 0.80 grams (1 piece)		150 mm. (Metric)
6.40 mm. (Head) ±0.2 mm  Thickness ≈ 1.21 mm. (Body) ± 10%  -40°F to +185°F (Fahrenheit)  -40°C to +85°C (Celsius)  33.0 lbs (Imperial)  15.0 Kgs (Metric)  30.0 mm. (Minimum)  35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)	Width	3.60 mm. (Body) ±0.2 mm
Operating Temperature  -40°F to +185°F (Fahrenheit) -40°C to +85°C (Celsius)  33.0 lbs (Imperial)  15.0 Kgs (Metric)  30.0 mm. (Minimum) 35.0 mm. (Maximum)  Weight  **0.80 grams (1 piece)		6.40 mm. (Head) ±0.2 mm
Operating Temperature -40°C to +85°C (Celsius)  33.0 lbs (Imperial) 15.0 Kgs (Metric) 3.0 mm. (Minimum) 35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)	Thickness	≈ 1.21 mm. (Body) ± 10%
-40°C to +85°C (Celsius)  33.0 lbs (Imperial)  15.0 Kgs (Metric)  3.0 mm. (Minimum)  35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)	Operating Temperature	-40°F to +185°F (Fahrenheit)
Minimum Tensile Strength  15.0 Kgs (Metric)  3.0 mm. (Minimum)  35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)		-40°C to +85°C (Celsius)
15.0 Kgs (Metric)  3.0 mm. (Minimum)  35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)	Minimum Tensile Strength	33.0 lbs (Imperial)
Bundle Diameter  35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)		15.0 Kgs (Metric)
35.0 mm. (Maximum)  Weight ≈ 0.80 grams (1 piece)	Bundle Diameter	3.0 mm. (Minimum)
		35.0 mm. (Maximum)
Factures Fact operation Good inculation Self looking Anti-correction and durability	Weight	≈ 0.80 grams (1 piece)
Leasy operation, 3000 insulation, 3elf-locking, Anti-corrosion and durability.	Features	Easy operation, Good insulation, Self-locking, Anti-corrosion and durability.

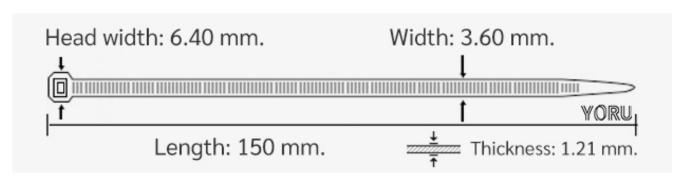





Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of ± 5% or ±0.2 mm).