
## **YORU Cable Ties Datasheet**



Model YR350-X8BCG
Size Label 14" x 7.2 mm.



Type Belt  Material Polyamide 6.6 High impact (Nylon 6.6 or PA66)  Flammability UL94 V-2  ROHS Compliant Yes  UL Recognized Yes  Releasable Closure No	
Material Polyamide 6.6 High impact (Nylon 6.6 or PA66)  Flammability UL94 V-2  ROHS Compliant Yes  UL Recognized Yes	Type
Flammability UL94 V-2  ROHS Compliant Yes  UL Recognized Yes	Турс
ROHS Compliant Yes  UL Recognized Yes	Material
UL Recognized Yes	Flammability
	ROHS Compliant
Releasable Closure No	UL Recognized
	Releasable Closure
Length 14 inch (Imperial)	Longth
350 mm. (Metric)	Lengui
7.20 mm. (Body) ±0.2 mm	Width
11.60 mm. (Head) ±0.2 mm	Width
<b>Thickness</b> ≈ 1.33 mm. (Body) ± 10%	Thickness
Operating Temperature -40°F to +185°F (Fahrenheit)	Operating Temperature
-40°C to +85°C (Celsius)	Operating reinperature
Minimum Tensile Strength 50.0 lbs (Imperial)	nimum Toncilo Strongth
22.0 Kgs (Metric)	illium rensile strength
Bundle Diameter 43.0 mm. (Minimum)	Pundlo Diameter
100.0 mm. (Maximum)	
Weight ≈ 3.50 grams (1 piece)	Weight
Features Easy operation, Good insulation, Self-locking, Surface smooth texture and Anti-corrosion.	Features

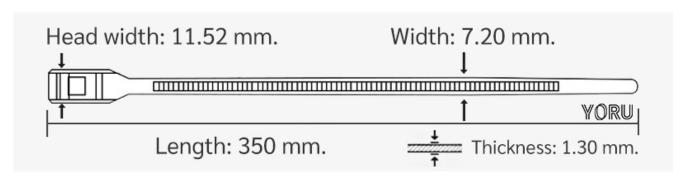





Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of ± 5% or ±0.2 mm).