




# YORU Cable Ties Datasheet



|            |               |
|------------|---------------|
| Model      | YR500-06STW   |
| Size Label | 20" x 5.2 mm. |

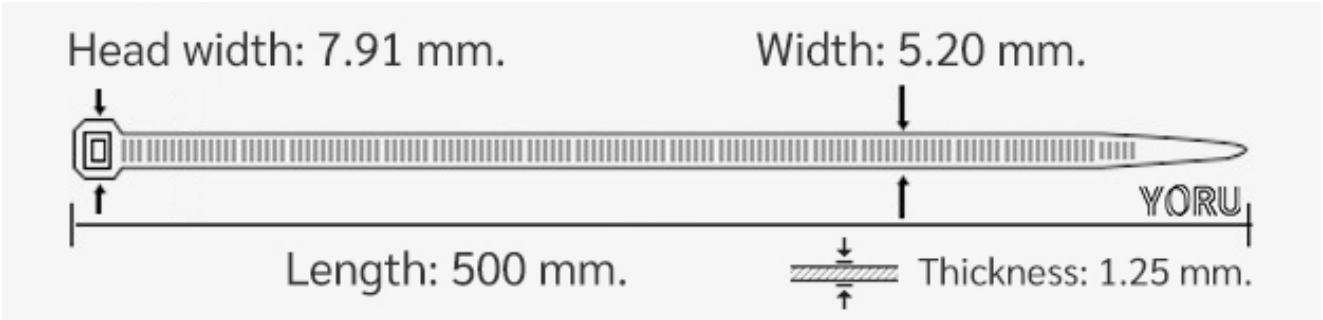

|                          |                                                                               |
|--------------------------|-------------------------------------------------------------------------------|
| Color                    | White (Natural)                                                               |
| Type                     | Standard                                                                      |
| Material                 | Polyamide 6.6 High impact (Nylon 6.6 or PA66)                                 |
| Flammability             | UL94 V-2                                                                      |
| ROHS Compliant           | Yes                                                                           |
| UL Recognized            | Yes                                                                           |
| Releasable Closure       | No                                                                            |
| Length                   | 20 inch (Imperial)                                                            |
|                          | 500 mm. (Metric)                                                              |
| Width                    | 5.20 mm. (Body) $\pm 0.2$ mm                                                  |
|                          | 7.91 mm. (Head) $\pm 0.2$ mm                                                  |
| Thickness                | $\approx 1.25$ mm. (Body) $\pm 10\%$                                          |
| Operating Temperature    | -40°F to +185°F (Fahrenheit)                                                  |
|                          | -40°C to +85°C (Celsius)                                                      |
| Minimum Tensile Strength | 65.0 lbs (Imperial)                                                           |
|                          | 30.0 Kgs (Metric)                                                             |
| Bundle Diameter          | 4.0 mm. (Minimum)                                                             |
|                          | 150.0 mm. (Maximum)                                                           |
| Weight                   | $\approx 3.73$ grams (1 piece)                                                |
| Features                 | Easy operation, Good insulation, Self-locking, Anti-corrosion and durability. |

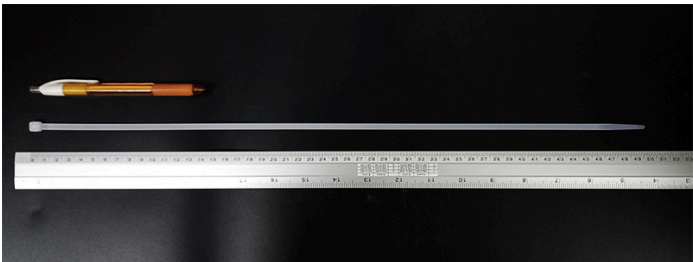

Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of  $\pm 5\%$  or  $\pm 0.2$  mm).