
YORU Cable Ties Datasheet



Model YR200-08STW
Size Label 8" x 7.2 mm.



Type Standard Material Polyamide 6.6 High impact (Nylon 6.6 or PA66) Flammability UL94 V-2 ROHS Compliant Yes UL Recognized Yes Releasable Closure No 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature 40°F to ±185°F (Fahrenheit)
Material Polyamide 6.6 High impact (Nylon 6.6 or PA66) Flammability UL94 V-2 ROHS Compliant Yes UL Recognized Yes Releasable Closure No 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature
Flammability
ROHS Compliant Yes UL Recognized Yes Releasable Closure No Length 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature -40°F to +185°F (Fahrenheit)
UL Recognized Yes Releasable Closure No Length 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature -40°F to +185°F (Fahrenheit)
Releasable Closure No Length 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature -40°F to +185°F (Fahrenheit)
Length 8 inch (Imperial) 200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm 1.25 mm. (Body) ± 10% Operating Temperature
Length 200 mm. (Metric) Width 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature -40°F to +185°F (Fahrenheit)
200 mm. (Metric) 7.20 mm. (Body) ±0.2 mm 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% -40°F to +185°F (Fahrenheit)
Width 11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% -40°F to +185°F (Fahrenheit)
11.25 mm. (Head) ±0.2 mm Thickness ≈ 1.25 mm. (Body) ± 10% Operating Temperature -40°F to +185°F (Fahrenheit)
Operating Temperature 40°F to +185°F (Fahrenheit)
Operating Temperature
Operating reinperature
-40°C to +85°C (Celsius)
Minimum Tensile Strength 88.0 lbs (Imperial)
40.0 Kgs (Metric)
Bundle Diameter 4.0 mm. (Minimum)
50.0 mm. (Maximum)
Weight ≈ 2.25 grams (1 piece)
Features Easy operation, Good insulation, Self-locking, Anti-corrosion and durability.

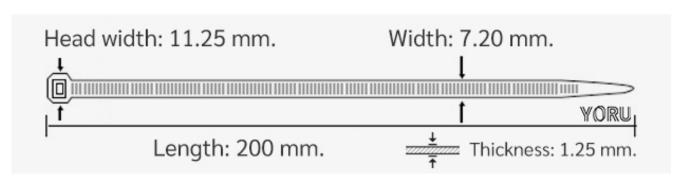





Pictures of products and dimensions are approximate and subject to technical changes (with a tolerance of ± 5% or ±0.2 mm).